

DISTRIBUTOR INFORMATION

COMPANY NAME _____

CONTACT NAME _____

DATE _____

PHONE _____

EMAIL _____

PROJECT JOB INFORMATION

INSTITUTION _____

CONTACT NAME _____

ADDRESS _____

CITY _____

STATE _____

ZIP _____

PHONE _____

EMAIL _____

S.R.Smith manufactures a wide range of starting blocks for use at all levels of competitive swimming, and takes into consideration rules and regulations from World Aquatics, USA Swimming, National Collegiate Athletic Association (NCAA), National Federation of State High School Associations (NFSH), and the Model Aquatic Health Code (MAHC). S.R.Smith and the end user also recognize that state and local building codes apply in various jurisdictions.

MINIMUM WATER DEPTH BY ORGANIZATION

- **WORLD AQUATICS** - 4 feet 5 inches
- **USA SWIMMING** - 4 feet for competition, 6 feet for teaching, 6 feet 7 inches for championship meets
- **NCAA** - 4 feet
- **NFSH** - 4 feet
- **MAHC** - 4 feet

S.R.SMITH RECOMMENDED MAXIMUM STARTING BLOCK HEIGHT OVER WATER

- **LESS THAN 4 FEET OF WATER DEPTH** - No starting block
- **4 FEET - 6 FEET OF WATER DEPTH** - 18 Inches
- **6 FEET OR MORE OF WATER DEPTH** - 29.5 Inches

DIMENSIONS

Water Depth: _____ Feet _____ Inches

Please add any additional dimensions (parapet, gutter, etc.) that will affect the design or placement of the starting block to Figure 1.

Block Height:

For water depth greater than 6', the recommended height above water is 29.5". For water depths 4' to 6', the recommended height above water is 18". S.R.Smith does not recommend installing starting blocks on water depths shallower than 4'.

Total height above water (29.5", 18", or a custom height) _____

Deck to water height _____

Height of block above deck _____

Block Setback:

The setback, measured from water's edge to the center of the starting block post (See Figure 1), ranges as follows, in one-inch increments:

- Standard 21" - 26"
- Mid-Range 27" - 32"
- Long Reach 33" - 40"

Things to consider are interference from gutters, parapets, and coping. The center point of the anchor should be at least 5" from any edge of the concrete slab.

Setback= _____


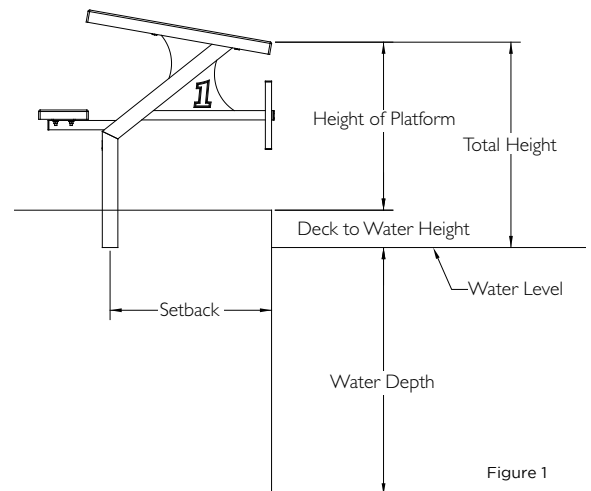



Figure 1

CHOOSE MODEL


STANDARD SETBACK 21" TO 26"




Velocity
with Track Start




Velocity
with Track Start
Side Mount-Left




Velocity
with Track Start
Side Mount-Right




Velocity
without Track Start




Velocity
without Track Start
Side Mount-Left




Velocity
without Track Start
Side Mount-Right



Legacy




Legacy
Side Mount-Left




Legacy
Side Mount-Right


MID-RANGE SETBACK 27" TO 32"



Velocity
with Track Start




Velocity
without Track Start




Legacy


LONG-RANGE SETBACK 33" TO 40"



Velocity
with Track Start



Velocity
without Track Start



Legacy

Help us serve your clients better by including architectural line drawings and specifications for new installations, and line drawings and/or photos for existing applications.

ORDER DETAILS

Quantity: _____

Frame Color: Silver Gray Royal Blue Taupe White Custom _____ (PMS or RAL#)

Standard color is Silver Gray. Other colors are available. There is no fee for any of our standard colors listed. Place a check next to your desired color or identify a custom color (RAL # is the most accurate way to specify custom colors). Custom colors will incur additional fees and lead-time.

Numbering: _____

How would you like the blocks numbered? (i.e., 12 starting blocks could be numbered 1-12, two sets of 1-6, or 1-11 with one blank)

Anchors:

NEW - MUST ORDER SEPARATELY - It is possible to have the anchors shipped before the blocks to allow anchor installation prior to delivery of the starting blocks. Notify your salesperson if you would be interested in ordering and having the anchors shipped prior to shipping the blocks.

Backstroke Handles:

The standard backstroke handle is the Horizontal. H-Handle, U-Handle, and Angled configurations are also available. If no option is marked, the Backstroke Horizontal will be used.




Horizontal



Angled



U-Handle



H-Handle

Side Handles:

Yes No



SPECIAL REQUEST

Only one of the following choices (A, B, or C) can be selected for your starting block order. These items also include additional charges and lead time.

A - TrueTread™ Yellow Red Gray Blue

Velocity footboards are available in a choice of four TrueTread™ colors. Place a mark next to the desired color.

B - Logo/Footboard Numbers (Not available with TrueTread) Yes, we want a logo Yes, we want numbering on footboard

If you would like a logo or numbering placed on the footboards, please email file in vector-based file or formats. We will send a separate drawing of the logo/numbering placement on the footboard to be signed off along with the drawing for the starting block(s).

C - Colored Sand Tread Yellow Red Green Blue

You can get the tread for the footboard and step in a selection of colors. Place a mark next to the desired color. Standard color for the tread is white. White will be used if there is no color tread or logo selected.

Distributor and End User understand that regulations of governing bodies, including those listed above along with state and local codes, supersede these recommendations when they require additional depth. For example, a pool that will host World Aquatics swim meets cannot place starting blocks in water depths of less than 4 feet 5 inches because it does not meet the minimum depth for World Aquatics. By ordering, purchasing and installing S.R.Smith starting blocks, the Distributor and End User acknowledge receipt and understanding of the above recommendations.

END USER SIGNATURE

PRINT NAME

DATE

DISTRIBUTOR SIGNATURE

PRINT NAME

DATE