



maelstromTM
MS-1 series

3hp - 2 speeds, 12A - 240V

Introducing the pump with the best price-quality ratio on the hot tub aftermarket.



Gecko Motor

Welcome our brand-new Gecko custom made motor! We've put all our engineering knowledge at work to offer the best efficiency on the market. Thanks to the expertise that belongs to the rich history of Gecko, this pump offers outstanding performance in a compact design.



Moves water efficiently

Dynamics between pump components are complex. To ensure optimal output, Maelstrom pumps are engineered to run at their sweet spot.

The low speed is providing sufficient flow for the heater circulation at a low current draw.



Uncompromising quality

Built to last with the ultimate materials, Maelstrom pumps offer the best value on the market. Combined with the renowned North American Gecko quality and customer service, you obtain the best supply solution for your spa pumps.



3.0hp - 2 speeds, 12A - 240V

Model: MS-1-V26-3.0-2

Generic part number: 0800-390000

Electrical / Hydraulic

hp in	hp out	Input Rating	Frame Size	Speed	A	HMAX (ft)	QMAX (GPM)
3,5	3,0	230V 60Hz	56	High	12	72	209
				Low	3,5	17	99

Weight: 41 lb (18.60 kg)



Specification:

- Longer life capacitor with high temp. 85°C
- High ambient temperature run rated 60°C
- Maximum water temperature 50°C
- Sealed bearing
- Low energy in low speed
- Construction
 - High speed: PSC
 - Low speed: Resistance start
- Seal: Gecko high quality Universeal
- 2" intake and discharge
- Insulation Class F thermally protected
- UL approbation E62386


Standard version includes:

- Tail piece (2)
- Three wing nut drain plugs
- 96" cable with AMP plug
- Wet end position at 0 o'clock


Strong packaging solution:

- Dual layered cardboard with molded foam for safe storage and transportation.

Dimensions

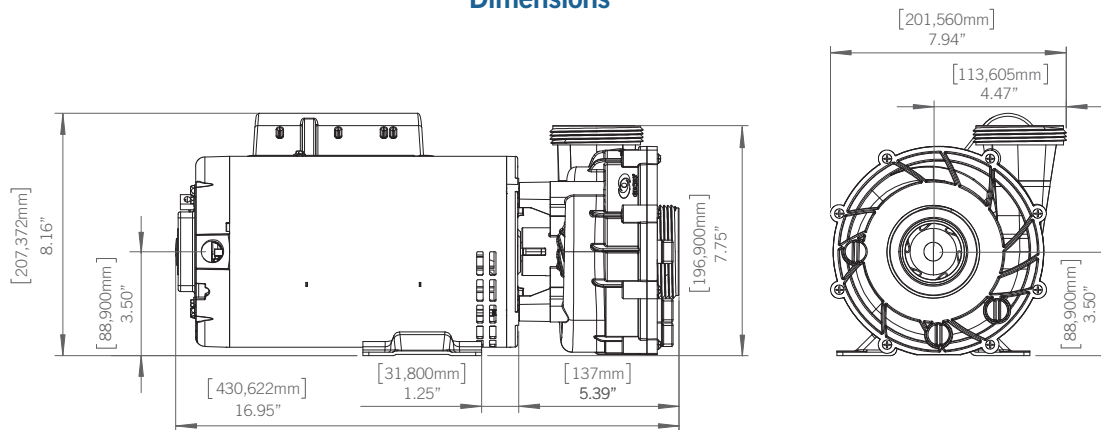

performance curves

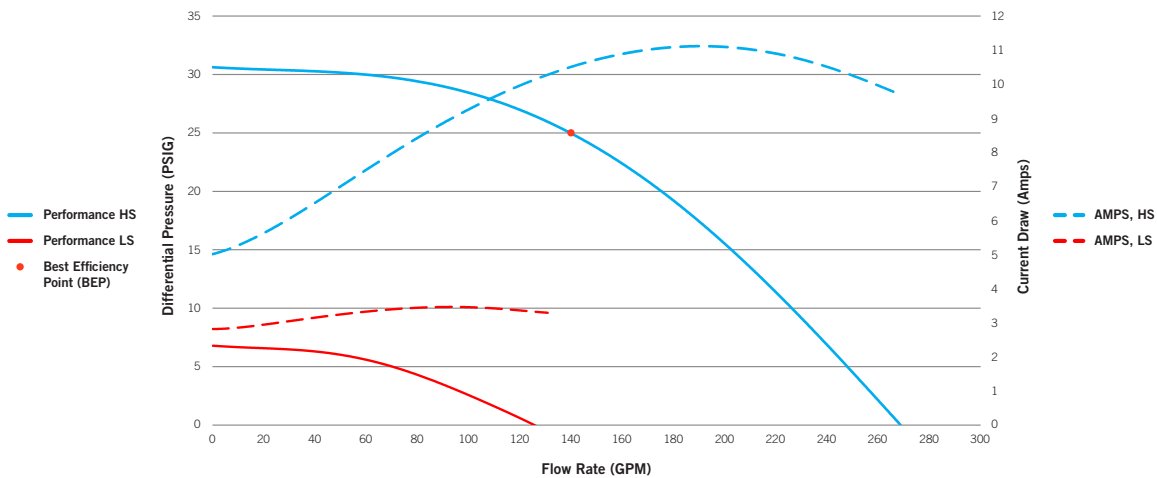

maelstrom™

450 des Canetons, Quebec City, QC Canada G2E 5W6, 800.78.GECKO, info@geckoal.com
 www.geckoalliance.com www.geckopumps.com