

16" SQUARE ANTI-ENTRAPMENT SUCTION OUTLET WITH SIDE 3" SOCKET SUMP



**VGB CERTIFIED
SPECIFICATIONS**

Floor Flow Rating
460 GPM at 1.5 fps

Wall Flow Rating
445 GPM at 1.4 fps

Sump Depth
Use sump included

Open Area
101 in²

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Sump manufactured from strong PVC sump with 3" socket and 4" spigot side port, and 2" socket 2½" spigot bottom port

Drain cover manufactured from superior UV-resistant engineered polymers

Comes with 3" and 2" NPT cap with o-ring for pressure testing and winterizing

#316 stainless steel screws

Trademarked VGB compliance button easily identifies VGB 2008 compliant cover from on deck and underwater

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

1 per case

NEW Hassle-free pressure testing and winterizing



Optional 2" hydrostatic relief valve available p/n SK43101




Hassle-free pressure testing and winterizing
Comes with a 3" and 2" NPT cap with O-ring. *No knock-outs required.*

Part # 1216xxxSSB

STANDARD COLORS

- 1216101SSB – White
- 1216102SSB – Black
- 1216103SSB – Light Gray
- 1216104SSB – Blue
- 1216105SSB – Dark Gray
- 1216108SSB – Tan

VGB 2008 Compliant

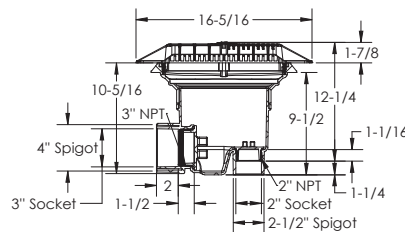

1. Side Port Sump Bucket, 12" Square Frame
2. 2" NPT Plug
3. 3" NPT Plug
4. 3" Plug O-Ring
5. 2" Plug O-Ring
6. 10 x 1" Flat Head Phillips 316 SS, Qty 4
7. 10-32 x 1" Pan Head Phillips, 316, Qty 4
8. 16" Square Anti-Entrapment Cover
9. 12" to 16" Square Adapter

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940

info@aquastarpoolproducts.com www.aquastarpoolproducts.com