

## 24" SQUARE FRAME WITH FOUR 12" SQUARE FLAT GRATE ANTI-ENTRAPMENT SUCTION OUTLET COVERS



### VGB CERTIFIED SPECIFICATIONS

**Floor Flow Rating**  
1531 GPM at 1.4 fps

**Wall Flow Rating**  
1531 GPM at 1.4 fps

**Sump Depth**  
12" minimum

**Open Area**  
352 in<sup>2</sup>

### FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Installs flat – level with finish

Manufactured from superior UV-resistant engineered polymers

#316 stainless steel screws


Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Trademarked VGB compliance button easily identifies VGB 2008 compliant cover from on deck and underwater

Replace drain cover every five years from the date of installation

1 per case

**Unblockable! No second suction outlet or backup SVRS required**

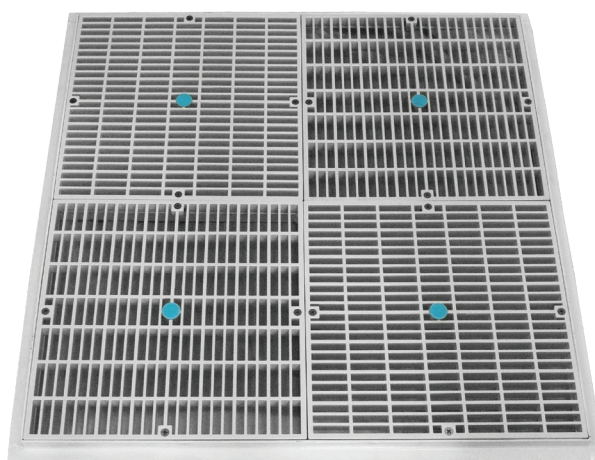

Part # 24xxx

Fits: AquaStar standard 24" models and American (Pentair) with 3/4" deep existing window grid frame and 4x4 screw hole pattern.



### STANDARD COLORS

- 24101 – White
- 24102 – Black
- 24103 – Light Gray
- 24104 – Blue
- 24105 – Dark Gray
- 24108 – Tan

Also available with four grates for 3/4" deep retrofits p/n 24NFxxx

Replaces p/n WAV24xxx, P24xxx

**VGB 2008 Compliant**

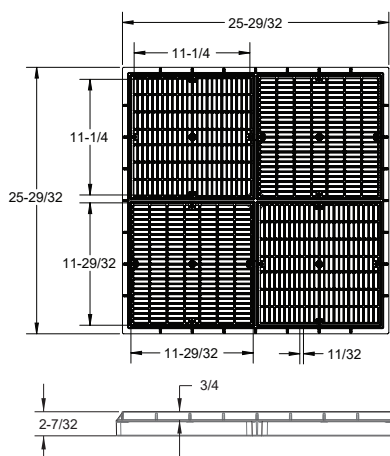

1. 24" Square Mud Frame
2. 12" Flat Square Suction Outlet Cover, Qty 4
3. 10 x 3/4" Flat Head Phillips Screw, 316 SS, Qty 16

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940  
info@aquastarpoolproducts.com www.aquastarpoolproducts.com